


vebrores EP HBC HCR

0.35 mm

vebrores EP HBC HCR is a pigmented, easily-applied, high build epoxy floor coating system designed to offer enhanced chemical resistance including against Skydrol aviation hydraulic fluid.



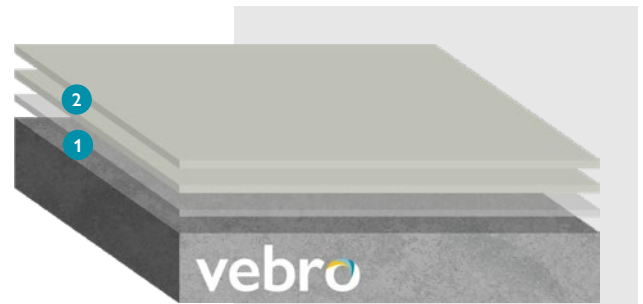



1 Primer

vebro EP Primer
0.30 kg/m²

2 Coating

vebro EP Universal HBC
1st Coat: 0.30 kg/m²
2nd Coat: 0.30 kg/m²

Benefits

-  Excellent resistance to industrial chemicals including Skydrol
-  Solvent-free and low odour formulation
-  Slip resistance profile can be customised
-  Easily applied with a roller or rubber squeegee

Applications

- ✓ Light to Medium Duty Industrial Process Areas
- ✓ Warehouse & Distribution Centres
- ✓ Chemical Stores
- ✓ Plant Rooms & Storage Units
- ✓ Garages

Stocked Colours

Glorious Greys



Brilliant Brights



*A surcharge to the quoted list price will apply to all colours selected from the 'Brilliant Brights' range. Other colours can be produced to order; however, these will be priced on application and minimum order quantities will apply. For example, an MOQ of 100.0 kg will apply to vebro EP Universal chosen in a special colour.

vebrores EP HBC HCR

Technical Profile

Performance Criteria		
BS 8204-6	Type 3	
Finish	Coloured High Gloss	
Solids Content	> 98%	
Dry Film Thickness	150 – 200 microns per coat. Two coats recommended.	
Slip Resistance	BS 7976 (Dry Conditions)	Low Slip Potential PTV 36+
Compressive Strength	EN 196-1	70 N/mm ²
Flexural Strength	EN 196-1	40 N/mm ²
Adhesive Strength	EN ISO 4624	> 2.5 N/mm ² (concrete failure)
Shore D Hardness	EN ISO 868	82
Chemical Resistance	Resistant to a very wide range of chemicals. For a full chemical resistance breakdown contact our Technical Services team.	
Fire Resistance	EN 13501-1	B _n -s1
VOC Content	Complies with category j type SB (< 500 g/l). VOC content is approx. 140 g/l.	
Working Time	approx. 20 minutes	
Storage	Keep at an ambient 5 – 35°C temperature in dry, frost-free conditions	
Shelf Life	24 months in unopened original packaging	
Speed of Cure (at 20°C)	Light Foot Traffic – 16 hours	Heavy Duty Traffic – 48 – 72 hours
	Light Wheeled Traffic – 24 hours	Full Chemical Cure – 7 days

The typical physical properties given above are derived from testing in a controlled laboratory environment at 20°C. Results derived from testing field applied samples may vary dependent upon site conditions. The slip resistance figures given above are affected by application techniques and prevailing site conditions. Slip resistance can reduce over time due to poor maintenance, general wear or surface contaminants. Good housekeeping practices should be observed.

Installation of Vebro Polymers' products should be carried out by an applicator with documented quality assurance and experience.

All consumptions listed are calculated using Vebro Polymers' approved quartz sands and fillers, the use of other third party material may cause changes to both the consumptions listed and the system's technical performance. Detailed application instructions and advice can be provided on request through our Technical Services team.

vebrores systems are suitable for application on concrete substrates exhibiting a minimum strength of 25 N/mm². The substrate should be capable of bearing loads, free of cracks and voids as well as free from laitance, dust and other contamination according to the appropriate standards.

The substrate must be dry to 75% RH in line with BS 8203 and free from rising damp and ground water. **vebro EP DPM** in two coats can be used for substrates up to 100% RH (surface dry).

Vebro Polymers' systems and products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. For more information, please refer to individual product data sheets or contact our Technical Services team – technical@vebro polymers.com

All data values and suggested practices listed on system data sheets are approximate and for representation purposes only. In all instances, prior to installation a project-specific specification and / or professional advice should be sought.

Vebro Polymers accepts no responsibility for liability claims based on the suggested practices and data values listed on system data sheets. System Data Sheets are regularly updated and it is the user's responsibility to ensure they obtain the most recent version. The most recent versions can be found at www.vebro polymers.com

for chemistry you can count on...

The Court, Kestrel Road, Trafford Park, Stretford, Manchester M17 1SF

w: vebro polymers.com | **e:** hello@vebro polymers.com | **t:** +44 (0) 1618 738 396

Vebro Polymers UK Ltd trading as Vebro Polymers. Registered in England & Wales. Company number: 12261265.
Registered office: The Court, Kestrel Road, Trafford Park, Stretford, Manchester M17 1SF