




## vebroflex Comfort UV Plus

2.0 - 3.0 mm

vebroflex Comfort UV Plus is a seamless, flexible, polyurethane comfort resin flooring system with a clear UV seal coat for enhanced colour stability.

vebroflex Comfort UV Plus is a liquid-applied alternative to vinyl floor coverings, providing a hygienic finish and an elastic cushioning effect underfoot.

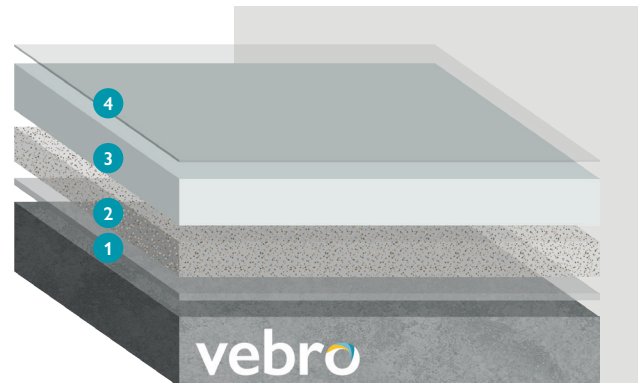

### 1 Primer

vebro EP Primer  
0.50 kg/m<sup>2</sup>

### 2 Sand Scatter

vebro 52 Silica Sand  
1.50 kg/m<sup>2</sup>

### 3 Body Coat

vebroflex PU SL UV Plus  
2.50 kg/m<sup>2</sup> at 2.0 mm  
3.75 kg/m<sup>2</sup> at 3.0 mm

### 4 Sealer

vebroflex PU UV WB Seal  
(Clear Matt)  
0.11 kg/m<sup>2</sup>

### Benefits

- Cushioning effect provides high levels of user comfort
- Absorbs impact sound by up to 3 dB
- Reduces heat loss in multi-occupancy spaces
- Excellent cleanability and seamless hygienic finish
- Available in special colours, marble effects and other custom patterns

### Applications

- ✓ Medium duty, frequently trafficked public spaces
- ✓ Healthcare facilities and residential homes
- ✓ Schools, colleges and crèche facilities
- ✓ Health clubs, leisure and sports facilities
- ✓ Museums and libraries
- ✓ Commercial offices and mixed-use or multi-occupancy spaces



Please note, the applied colours may differ from the examples shown. \*Special colours will incur an additional supplement. To discuss colour cards and samples, please contact our Technical Services team - [technical@vebro polymers.com](mailto:technical@vebro polymers.com)

## Technical Profile

Performance Criteria		
<b>Tensile Strength</b>	DIN 53504	approx. 9 N/mm <sup>2</sup>
<b>Elongation at Break</b>	DIN 53504	approx. 60%
<b>Tear Resistance</b>	DIN 53515	approx. 12 N/mm <sup>2</sup>
<b>Shore Hardness</b>	EN ISO 868	Shore A 80 (after 28 days)
<b>Classification</b>	EN 685	Private Buildings: 23 Public Buildings: 34
<b>Impact Sound Absorption</b>	DIN 4109	ca. 2 – 3 dB
<b>Wear Resistance</b> (Taber Abrader)	EN ISO 5470-1 ASTM D 1044	≤ 30 mg
<b>Impact Strength</b>	EN 13813	≥ 4 Nm (IR4)
<b>Anti-Skid Properties</b>	BGR 181 / DIN 51130	class R9 / R10
<b>Adhesive Strength</b>	EN ISO 4624	>1.5 N/mm <sup>2</sup>
<b>Fire Resistance</b>	EN 13501-1	B <sub>f</sub> -S1

The typical physical properties given above are derived from testing in a controlled laboratory environment at 20°C. Results derived from testing field applied samples may vary dependent upon site conditions.

Installation of Vebro Polymers' products should be carried out by an applicator with documented quality assurance and experience.

All consumptions listed are calculated using Vebro Polymers' approved quartz sands and fillers, the use of other third party material may cause changes to both the consumptions listed and the system's technical performance. Detailed application instructions and advice can be provided on request through our Technical Services team.

**vebroflex** systems are suitable for application on cementitious substrates. These should be capable of bearing loads, free of cracks and voids as well as free from laitance, dust and other contamination. Concrete must exhibit a pull off strength > 1.5 N/mm<sup>2</sup> and residual moisture content < 4% CM.

With higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory.

Vebro Polymers' systems and products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. For more information, please refer to individual product data sheets or contact our Technical Services team – [technical@vebropolymers.com](mailto:technical@vebropolymers.com)

All data values and suggested practises listed on system data sheets are approximate and for representation purposes only. In all instances, prior to installation a project-specific specification and / or professional advice should be sought.

Vebro Polymers accepts no responsibility for liability claims based on the suggested practises and data values listed on system data sheets. System Data Sheets are regularly updated and it is the user's responsibility to ensure they obtain the most recent version. The most recent versions can be found at [www.vebropolymers.com](http://www.vebropolymers.com)

for chemistry you can count on...

The Court, Kestrel Road, Trafford Park, Stretford, Manchester M17 1SF

**w:** [vebropolymers.com](http://vebropolymers.com) | **e:** [hello@vebropolymers.com](mailto:hello@vebropolymers.com) | **t:** +44 (0) 1618 738 396