





vebrodeck MMA ED (B3.2)

4.0 – 5.5 mm

vebrodeck MMA ED is a fast-cure, methyl-methacrylate deck wearing system with dynamic crack bridging capabilities (Class B3.2) between 0.3 – 0.6 mm designed for use on top decks of multi-storey parking structures.


vebrodeck MMA ED protects against weathering as well as water and chloride ion ingress and provides resistance to thermal shock and movement.

Benefits


-  Dynamic crack bridging according to EN 1062-7 class B3.2 (-20°C)
-  Offers a fast return to service
-  Excellent resistance to thermal shock, movement and weathering
-  Protects against oils, fuels and de-icing salts

Applications

- ✓ External Car Park Decks
- ✓ Partially Exposed Decks
- ✓ Ramps & Turning Circles
- ✓ Loading Bays



Please note: the applied colours may differ from the examples shown. Special colours will incur an additional supplement. To discuss colour cards and samples, please contact our Technical Services team – technical@vebropolymers.com

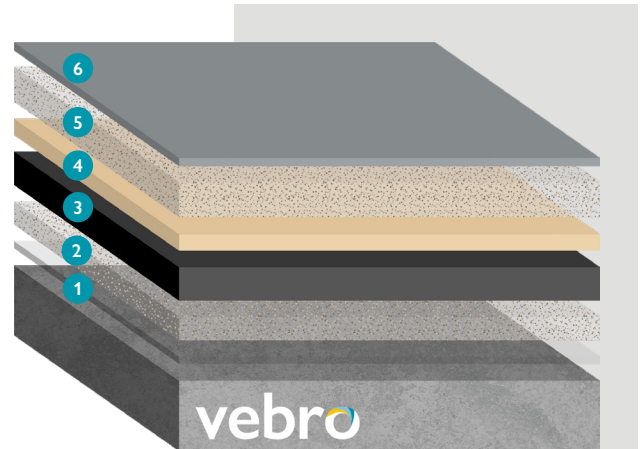

1 Primer

vebro MMA Damp Primer
0.40 kg/m²

2 Scatter

vebro Natural Quartz
0.30 kg/m²

3 Membrane

vebrodeck MMA Membrane
1.30 – 2.60 kg/m²

4 Binder

vebro MMA Flex Binder
at 0.75 kg/m² with vebro
MMA Filler at 0.75 kg/m²

5 Scatter

vebro Natural Quartz
2.50 kg/m²

6 Topcoat

vebrodeck MMA Topcoat
0.60 kg/m²

Catalyst

vebro MMA Catalyst at 2% on binder weight is recommended throughout the system build-up.

HD Version

A heavy-duty version for use on ramps and turning circles is available. Contact technical@vebropolymers.com for details.

Technical Profile

Performance Criteria		
Speed of Cure	Light Foot Traffic – 45 minutes	Full Chemical Cure – 90 minutes
Dynamic Crack Bridging	EN 1062-7	II _{T+V} (B 3.2)
Abrasion Resistance	Class AR1 – Heavy Duty	
Impact Resistance	EN ISO 6272-1	Class II ≥ 10 Nm
Weathering	EN 1062-11	No signs of blistering, cracking or flaking after 80 days of accelerated UV exposure
Chemical Resistance	Resistant to a very wide range of chemicals. For a full chemical resistance breakdown contact our Technical Services team.	
Adhesion	EN 1542 (Pull Off Test)	≥ 1.5 N/mm ²
Fire Resistance	EN ISO 13501	E _{fl}
Water Vapour Permeability	EN ISO 7783-2	Class II
Slip Resistance	DIN 51130	R11 to R13
Chloride Ion Resistance	DOT BD47/94: Appendix B Method B4,2(d)	None after 28 days
Temperature Resistance	-20°C – 60°C (>80 °C for intermittent periods)	

The typical physical properties given above are derived from testing in a controlled laboratory environment at 20°C. Results derived from testing field applied samples may vary dependent upon site conditions. The slip resistance figures given above are affected by application techniques and prevailing site conditions. Slip resistance can reduce over time due to poor maintenance, general wear or surface contaminants. Good housekeeping practices should be observed.

Installation of Vebro Polymers' products should be carried out by an applicator with documented quality assurance and experience.

All consumptions listed are calculated using Vebro Polymers' approved quartz sands and fillers, the use of other third party material may cause changes to both the consumptions listed and the system's technical performance. Detailed application instructions and advice can be provided on request through our Technical Services team

vebrodeck systems are suitable for application on cementitious substrates. These should be capable of bearing loads, free of cracks and voids as well as free from laitance, dust and other contamination according to the appropriate standards. Concrete must exhibit a pull off strength > 1.5 N/mm² and a residual moisture content < 4 % CM.

With higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory.

Vebro Polymers' systems and products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. For more information, please refer to individual product data sheets or contact our Technical Services team – technical@vebropolymers.com

All data values and suggested practises listed on system data sheets are approximate and for representation purposes only. In all instances, prior to installation a project-specific specification and / or professional advice should be sought.

Vebro Polymers accepts no responsibility for liability claims based on the suggested practises and data values listed on system data sheets. System Data Sheets are regularly updated and it is the user's responsibility to ensure they obtain the most recent version. The most recent versions can be found at www.vebropolymers.com

for chemistry you can count on...

The Court, Kestrel Road, Trafford Park, Stretford, Manchester M17 1SF

w: vebropolymers.com | e: hello@vebropolymers.com | t: +44 (0) 1618 738 396