






vebrodeck MMA Linemarker

0.5 mm (thickness)

vebrodeck MMA Linemarker is a pigmented, roller applied linemarker for use in conjunction with vebrodeck MMA systems.


vebrodeck MMA Linemarker is available in both Pure White & Traffic Yellow.

Benefits

-  Can be installed on exposed top decks
-  Low dirt pick up
-  Offers a fast return to service
-  Used to regulate traffic movement and denote pedestrian zones
-  Special colours available on request

Applications

- ✓ Car Park Bays
- ✓ Car Park Signage
- ✓ Driveways
- ✓ Directional Arrows

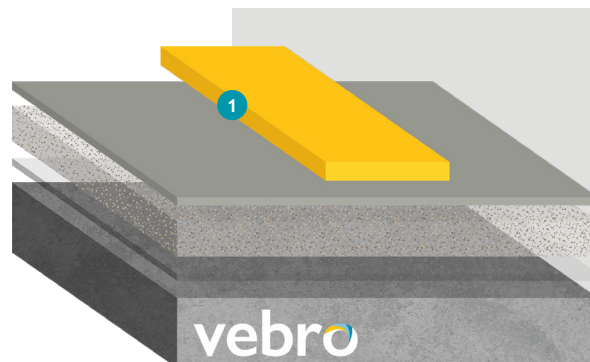

1 Road marker

vebrodeck MMA Linemarker
0.15 kg/m at 0.5 mm and
200.0 mm width
0.08 kg/m at 0.5 mm and
100.0 mm width
0.04 kg/m at 0.5 mm and 50.0
mm width

Catalyst

vebro MMA Catalyst at 0.016 kg/m²
is recommended

Primer

If used on concrete or cementitious
substrates, primer is required at
0.4 – 0.5 kg/m² (consult Technical Services –
technical@vebro polymers.com)



Traffic Yellow* Pure White*
RAL 1023 RAL 9010

Please note: the applied colours may differ from the examples shown. *Traffic colours will incur an additional supplement. To discuss colour cards and samples, please contact our Technical Services team – technical@vebro polymers.com

Technical Profile

Performance Criteria		
Viscosity	DIN 53 019	350 – 550 mPa
Flow Time	EN ISO 2431	45 – 70 sec
Density D_4^{20}	EN ISO 2811-2	1.2 g/cm ³
Flash Point	DIN 51 755	+10°C
Application Temperature	0°C – 30°C	
Working Time	approx. 15 minutes	
Speed of Cure	approx. 30 minutes	

The typical physical properties given above are derived from testing in a controlled laboratory environment at 20°C. Results derived from testing field applied samples may vary dependent upon site conditions. The slip resistance figures given above are affected by application techniques and prevailing site conditions. Slip resistance can reduce over time due to poor maintenance, general wear or surface contaminants. Good housekeeping practices should be observed.

Installation of Vebro Polymers' products should be carried out by an applicator with documented quality assurance and experience.

All consumptions listed are calculated using Vebro Polymers' approved quartz sands and fillers, the use of other third party material may cause changes to both the consumptions listed and the system's technical performance. Detailed application instructions and advice can be provided on request through our Technical Services team

vebrodeck systems are suitable for application on cementitious substrates. These should be capable of bearing loads, free of cracks and voids as well as free from laitance, dust and other contamination according to the appropriate standards. Concrete must exhibit a pull off strength > 1.5 N/mm² and a residual moisture content < 4 % CM.

With higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory.

Vebro Polymers' systems and products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. For more information, please refer to individual product data sheets or contact our Technical Services team – technical@vebro polymers.com

All data values and suggested practises listed on system data sheets are approximate and for representation purposes only. In all instances, prior to installation a project-specific specification and / or professional advice should be sought.

Vebro Polymers accepts no responsibility for liability claims based on the suggested practises and data values listed on system data sheets. System Data Sheets are regularly updated and it is the user's responsibility to ensure they obtain the most recent version. The most recent versions can be found at www.vebro polymers.com

for chemistry you can count on...

The Court, Kestrel Road, Trafford Park, Stretford, Manchester M17 1SF

w: vebro polymers.com | e: hello@vebro polymers.com | t: +44 (0) 1618 738 396